

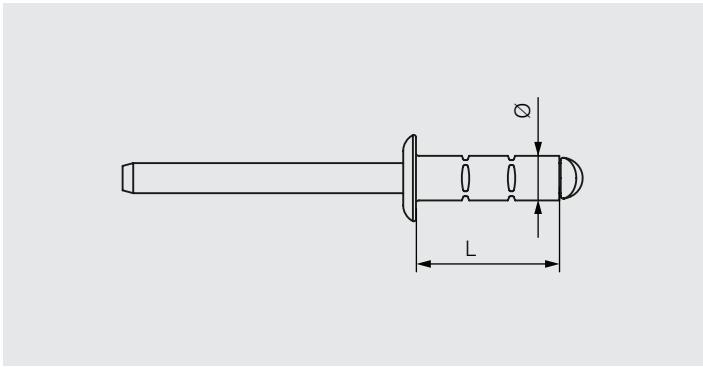


PolyGrip® rivets

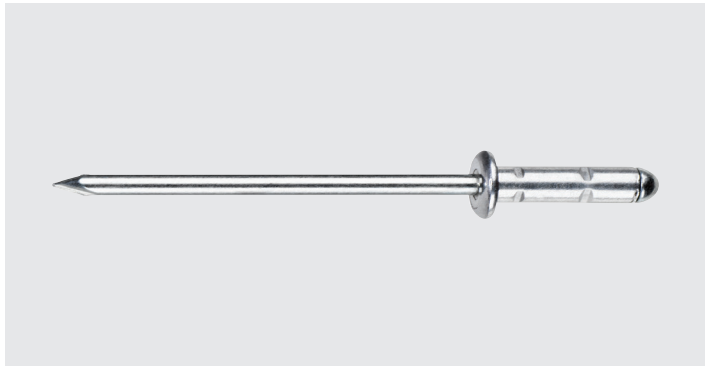

Description

Blind Rivet for securing overlaps and flashings

Application

Joining metal to metal in side lap and flashing details

Component 1 (t _I)	Component 2 (t _{II})	Σ _{max} t _I +t _{II}
–	–	See CL in table

Fastener material


- ST = Carbon Steel
- AL = Aluminium
- A2 = Stainless Steel A2
- A4 = Stainless Steel A4

Features and Benefits

- A wide grip range: A single PolyGrip® blind rivet can be a substitute for up to five different lengths of standard blind rivets.
- Outstanding hole filling capability: The rivet body expands radially during the setting process and compensates hole tolerances, centering deviations and differences in diameter, thus always giving a tight joint.
- Safe rest mandrel locking: PolyGrip® blind rivets neither generate rattling noises due to free moving rest mandrels nor do they allow it to fall off due to its encaging closing head and internal mandrel lock.
- Splashproof and water resistant: Hole filling and rest mandrel locking make them a real alternative to closed end rivets when it is essential to prevent water flowing through the whole joint and not only through the rivet body.
- A large head: for a high tensile and pull through resistance.

Approvals





Rivets in aluminium onto steel and aluminium

Product code	L	Ø	CL	Body material	Mandrel material	Pilot hole	
PG-C A4A4 4,8X10,0 F	10.0	4.8	1.0-6.5	SS A4	SS A4	4.9	1433923
PG-C A4A4 4,8X15,0 F	15.0	4.8	5.0-10.0	SS A4	SS A4	4.9	1433924
PG-C ALA2 4,8X10,0 F "CE"	10.0	4.8	0.5-6.5	Aluminium	SS A2	4.9	1433892
PG-C ALA2 4,8X15,0 F "CE"	15.0	4.8	4.5-11.0	Aluminium	SS A2	4.9	1433893
PG-C ALA2 4,8X17,0 F "CE"	17.0	4.8	6.5-13.0	Aluminium	SS A2	4.9	1433894
PG-C ALA2 4,8X17,0 F K16,0 "CE"	17.0	4.8	6.5-13.0	Aluminium	SS A2	4.9	1433899
PG-C ALST 4,8X10,0 F "CE"	10.0	4.8	0.5-6.5	Aluminium	Steel	4.9	1433831
PG-C ALST 4,8X15,0 F "CE"	15.0	4.8	4.5-11.0	Aluminium	Steel	4.9	1433832
PG-C ALST 4,8X17,0 F "CE"	17.0	4.8	6.5-13.0	Aluminium	Steel	4.9	1433833
PG-C ALST 4,8X25,0 F "CE"	25.0	4.8	11.0-19.5	Aluminium	Steel	4.9	1433838
PG-C ALST 4,8X15,0 F "CE"-RAL9006	15.0	4.8	4.5-11.0	Aluminium	Steel	4.9	1642887
PG-C ALST 4,8X15,0 F "CE"-BS10A05	15.0	4.8	4.5-11.0	Aluminium	Steel	4.9	1381901
PG-C ALST 4,8X15,0 F "CE"-RAL9010	15.0	4.8	4.5-11.0	Aluminium	Steel	4.9	1382342
PG-C ALST 4,8X15,0 F "CE"-RAL7016	15.0	4.8	4.5-11.0	Aluminium	Steel	4.9	1381516
PG-C A2A2 4,8X10,0 F "CE"	10.0	4.8	1.0-6.5	SS A2	SS A2	4.9	1433914
PG-C A2A2 4,8X15,0 F "CE"	15.0	4.8	5.0-10.0	SS A2	SS A2	4.9	1433915
PG-C A2A2 4,8X17,0 F "CE"	17.0	4.8	8.0-12.0	SS A2	SS A2	4.9	1433916
PG-C STST 4,8X10,0 F	10.0	4.8	1.5-6.5	Steel	Steel	4.9	1433873
PG-C STST 3,2X 8,0 F (GSMD41-43SPG)	8.0	3.2	1.0-5.0	Steel	Steel	3.3	1433866

PG-C	ALA2	5,0	18,0	F	K14,0	CE	RAL9010
PG-C = PolyGrip®	Body material Mandrel material	Body diameter (mm)	Body length (mm)	Head shape F=flat dome S=countersunk KK=small head RK=round head	Max. head diameter (mm)	CE marked	Painting (optional)

Fastener material guide

- ST = Carbon Steel
- AL = Aluminium
- A2 = Stainless Steel A2
- A4 = Stainless Steel A4



Accessories/Ancillaries

Product code	PU	
PowerBird Pro GE	1	1679666